

**Zastosowanie:**

- Elektrowibratory typu: 2EWc, EWd i EWg przeznaczone są do napędu urządzeń wibracyjnych służących do zagęszczania mieszanki betonowej, opróżniania silosów z materiałów sypkich, napędu przenośników wibracyjnych, zagęszczania mas formierskich itp.

**Budowa, zasada działania :**

- Elektrowibrator stanowi silnik indukcyjny klatkowy trójfazowy. Na czopach końcowych wału silnika zamocowane są mimośrodowo niewyważone masy. W czasie pracy elektrowibratora wirujące masy wywołują drgania całego wibratora. Drgający elektrowibrator wprawia z kolei w drgania elementy, do których jest zamocowany. Istotną zaletą elektrowibratorów EWe i EWg jest możliwość skokowej regulacji siły wymuszającej odpowiednio w przedziałach : 1,25 - 5,0 kN i 1,0 - 4,0 kN. Regulacji nie można dokonać w czasie pracy elektrowibratora.

**Wykonanie standardowe:**

- o stopniu ochrony IP 44,
- do pracy S3-40%,
- do pracy poziomej,
- na napięcie 380 V lub 500 V,
- częstotliwość 50 Hz,
- temperatura otoczenia -20 do +40°C,
- wysokość zainstalowania do 1000 m n.p.m.
- 

**Napęd urządzeń o konstrukcji zwartej :**

- W przypadku urządzeń wibracyjnych o zwartej konstrukcji można dobrać elektrowibrator typu 2EWc, EWe i EWg posługując się zamieszczonym wykresem nr 1. Wychodząc od wymaganej amplitudy drgań lub przyspieszenia, dla znanej masy części drgającej urządzenia znajduje się siłę, a następnie odpowiadający jej najbliższy stopień siły.

**Napęd urządzeń o konstrukcji wiotkiej :**

- W przypadku wykorzystania elektrowibratorów typu 2EWc, EWd i EWg do napędu urządzeń wibracyjnych zawierające elementy rozległe jak belki i dachy, na których w czasie pracy występują znaczne odkształcenia wymagany jest indywidualny tok obliczeń lub doświadczeń. W urządzeniach tych występują rezonanse. Gdy rezonans nie jest zamierzony, to częstotliwość drgań własnych urządzenia powinna się znacznie różnić od 50 Hz (np.  $f_w < 30$  Hz lub  $f_w > 70$  Hz).

**Sposób zamawiania:**

- W zamówieniu należy jednoznacznie podać pełne określenie typu, moc, siłę wymuszającą i napięcie sieci.

**Application:**

- Electrovibrators: 2EWc, EWd and EWg are intended for driving of vibratory implements which serve for consolidation of concrete, facilitate emptying of silos' loose materials, for driving of vibratory conveyors, consolidation of moulding sand etc.

**Design, principle of function :**

- The electrovibrator is a squirrel-cage, three-phase induction motor. There are fixed excentric out-of-balance weights on shaft ends. While running, the rotating weights cause oscillations of the entire vibrator. The oscillating vibrator in turn can set into oscillations the parts which it is fixed to. An essential advantage of the electrovibrators series EWe and EWg is the grading possibility of the enforcing strength at the range: 1,25 kN - 5,0 kN and 1,0 kN - 4,0 kN. During running of the electrovibrator, it can't be adjusted.

**Standard execution:**

- protection degree: IP 44,
- type of duty: S3-40%,
- horizontal working position,
- voltage: 380 V or 500 V,
- frequency: 50 Hz,
- ambient temperature: -20 up to +40°C,
- altitude: up to 1000 m.

**Driving implements of coherent structure :**

- Regarding driving vibratory implements of coherent structure, the selection of electrovibrators type 2EWc, EWd and EWg using the graph enclosed can be made. Considering the required vibration or acceleration amplitude, for a known mass of the vibrating part of the implement the grade of strength is set and after that a fitting nearest grade of force.

**Driving implements of supple structure :**

- Concerning the use of electrovibrators type 2EWc, EWd and EWg for driving vibratory implements containing widespread parts, such as beams and steel sheets, on which considerable deformations occur while working, an individual calculation procedure or experience is required. In these implements resonans appear. If the resonans is not intended then free - vibration frequency of the implement should considerable differ from 50 Hz ( e.g. free freq. < 30 Hz or free freq.> 70 Hz).

**How to order:**


- In the order there must be clearly given : full designation of the type, rated output, enforcing strength, network voltage.

## Parametry eksploatacyjne elektrowibratorów Performance of electrovibrators

Typ wibratora	Rodzaj pracy S3-40% (przerywana)							Siła wymuszająca na poszczególnych stopniach wzbudników						Masa
	Intermittent duty S3-40%							Enforcing strenght on particular levels of activators						
	$P_n$	$n_n$	$I_{1n}$ dla	$\cos \varphi_n$	$i_{rn}$	$m_{rn}$	$m_{maxn}$	6	5	4	3	2	1	Weight
Type of vibrator	Rated output	Rated speed	Rated current at 380 V	Power factor	Locked rotor torque	Locked rotor current	Break-down torque	[kN]						[kg]
	[kW]	[min <sup>-1</sup> ]	[A]	-	[%]	[%]	[%]							
EWg 1-4/50	0.25	2865	0.61	0.85	600	270	300	4,0	3,4	2,8	2,2	1,6	1,0	21,0
EWe 12	0.70	2840	1.30	0.82	570	350		5,0	3,75	2,5	1,25			29,0
2EWc 22a	0.85	2900	1.60	0.79	700	300	300	8,0						43,0
2EWc 22b	0.85	2900	1.60	0.79	700	300	300	12,0						44,0
2EWc 32a	2.10	2900	3.90	0.82	850	320	380	18,0						82,0
2EWc 32b	2.10	2900	3.90	0.82	850	320	380	25,0						83,0
2EWc 42a	4.80	2920	8.80	0.83	850	310	360	35,0						145,0
2EWc 42b	4.80	2920	8.80	0.83	850	310	360	45,0						146,5


\* Elektrowibratory dostarczone przez producenta mają ustawione wzbudniki na szóstym stopniu.

\* Electro vibrators offered by the manufacturer have activators set to six level.

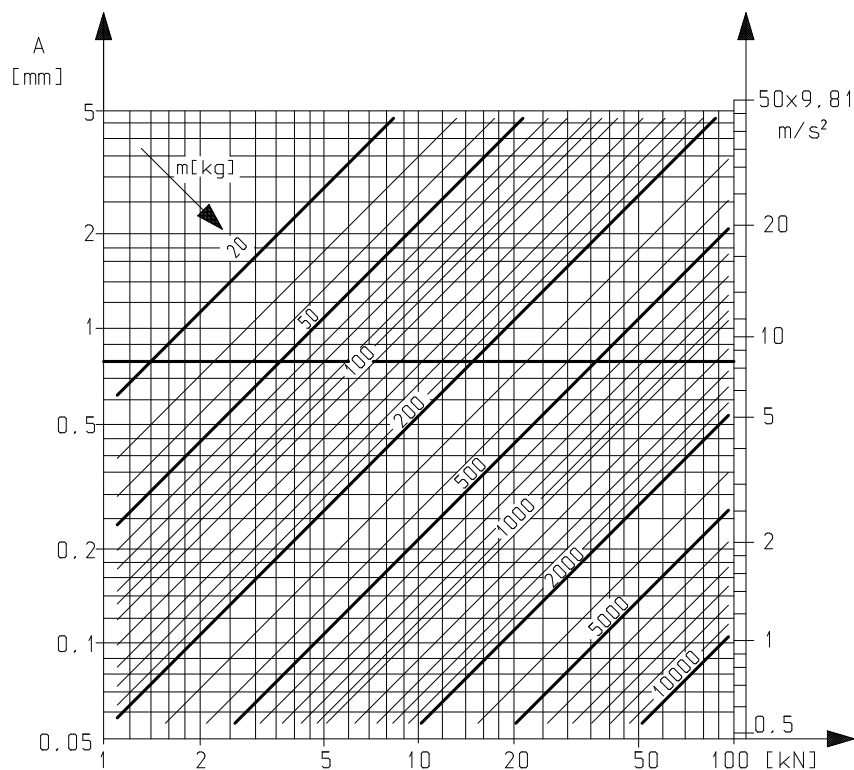

Wykres nr 1  
Graph 1


## Wymiary montażowe i gabarytowe Mounting Dimensions and overall dimensions

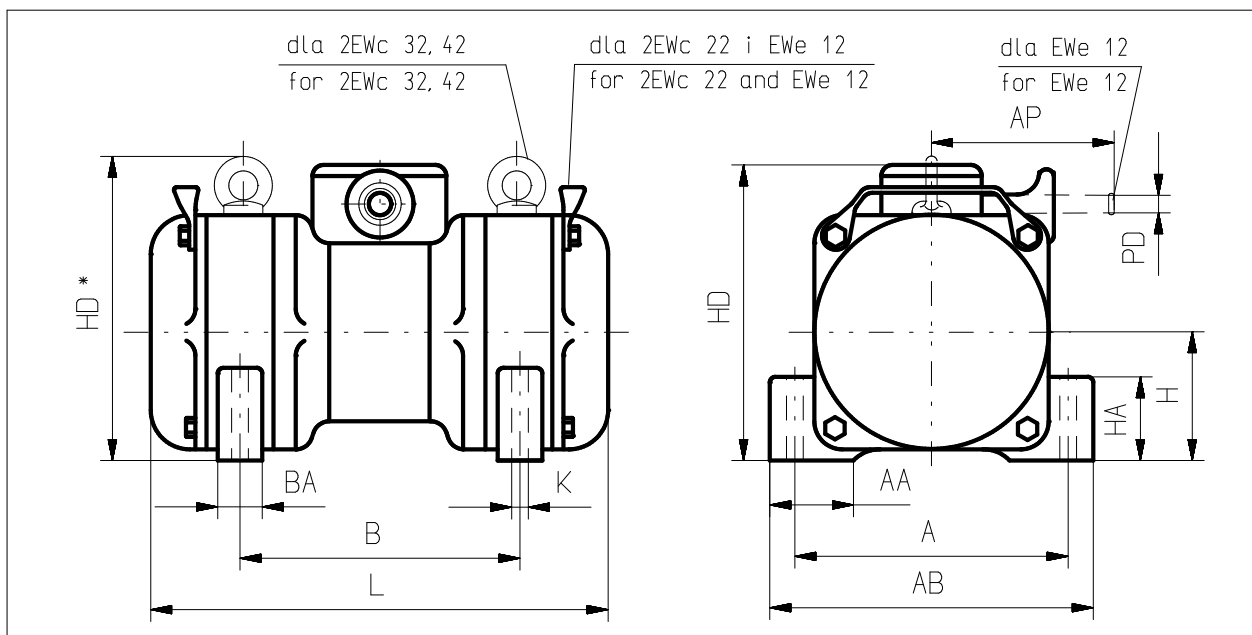

Typ Type	A	AA	AB	BA	B	H	HA	HD*	K	L	PD	AP	Łożysko nr Bearing no
	[mm]												
EWe 12	202	50.0	233	38	167	88	55	225.0	13	289	13	193	3206
2EWc 42a,b	342	90.0	390	62	322	157	90	363.5	22	490	-	-	NJ 314
2EWc 32a,b	282	76.5	323	55	247	128	90	307.0	18	401	-	-	NJ 311
2EWc 22a,b	227	50.5	260	40	190	104	66	254.0	17	321	-	-	NJ 308

HD\* dla elektrowibratorów 2EWc 32 i 42

HD\* for electrovibrators 2EWc 32 i 42

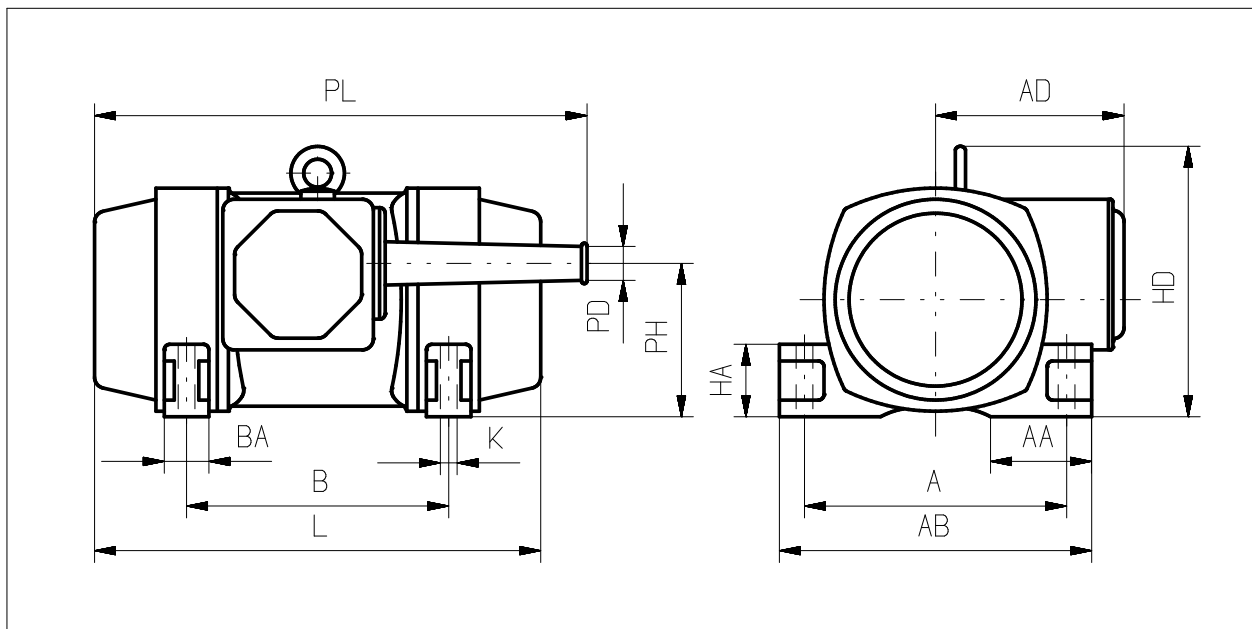

Typ Type	A	AA	AB	AD	BA	B	HA	HD	K	L	PH	PD	PL	Łożysko nr Bearing no
	[mm]													
EWg 1-4/50	166	61	196	126	36	166	50	164	13	290	90	13	315	6305 C3